

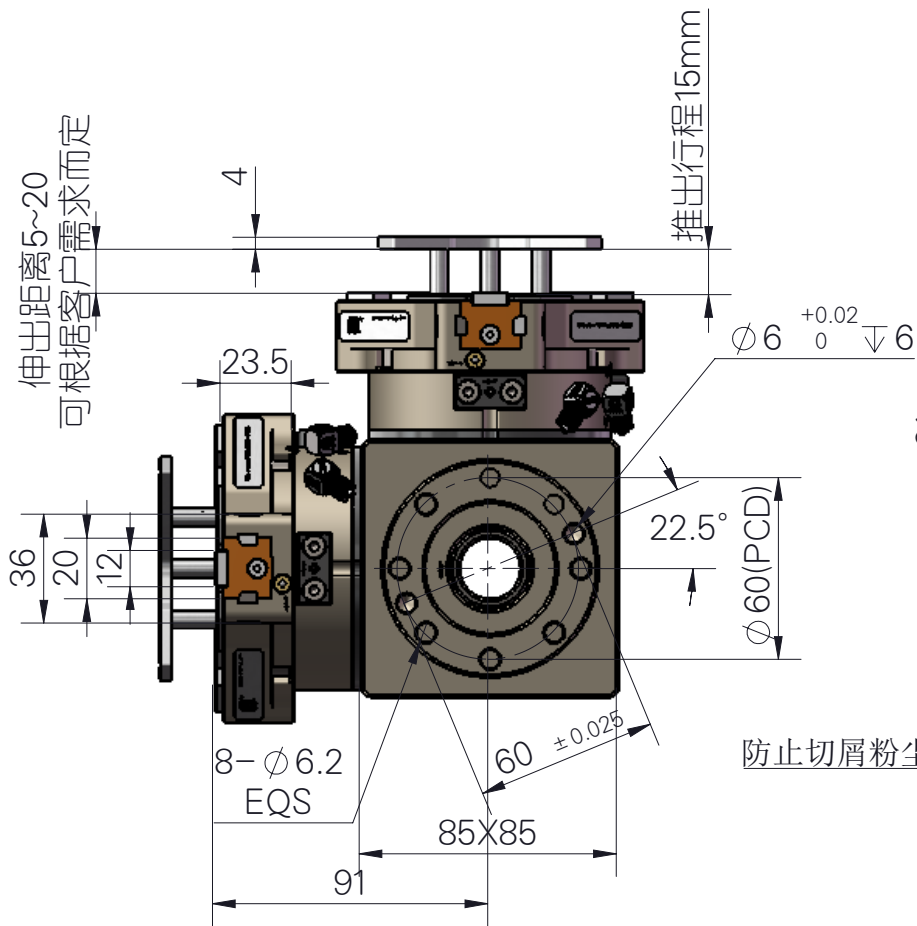


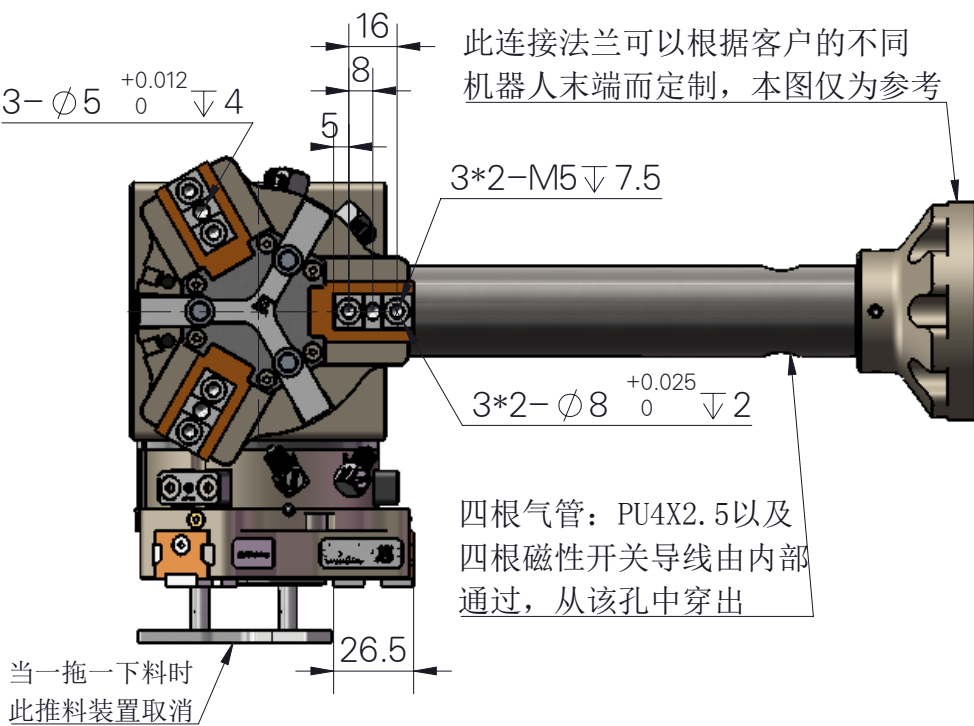

警告:

- 当操作夹爪工作时, 请人员务必远离夹爪和机器人的活动部位, 否则将会造成人身伤害的险;
 - 由于不同物件有其不同的摩擦系数, 当初次夹持工件时, 请在空旷场地进行试夹, 确保夹稳固后方可装机工作, 否则将会有跌落工件砸伤机器或人员的风险
- Warning:
- When operating the gripper, please keep away from it Gripper and robot's moving parts, otherwise it will Risk of personal injury;
 - Because different objects have different friction coefficients, When clamping the workpiece for the first time, please try clamping in an open field. Ensure that the clamping is firm before the machine can work, otherwise it will There is a risk that falling workpieces may damage machines or personnel.

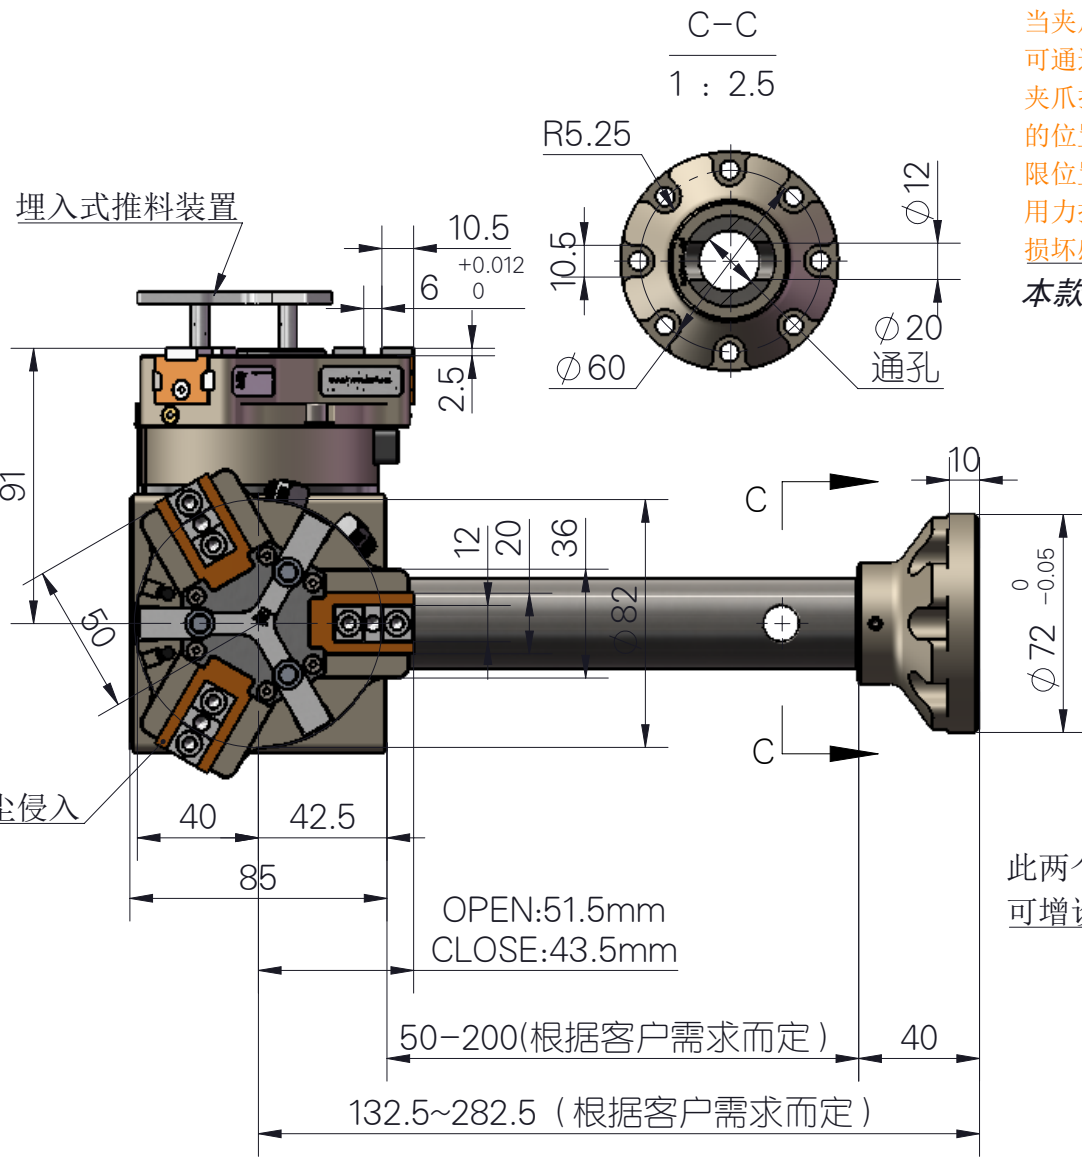

当夹爪采用接近开关时
可通过调节该螺钉确定
夹爪打开和夹紧工件时
的位置信号, 当拧到极
限位置后, 切不可继续
用力拧动, 否则会造成
损坏感应块的风险



本款为磁性开关款

短款磁性传感器
D-A93或D-M9P

此两个面为扩展面
可增设两个气缸夹爪

名称: 气动平行三爪六轴机器人上下料

型号 (Model): RBT-FY46ZM-D55

P: 空气压力 (bar) P: Air Pressure (bar)

L: 到作用点距离 (mm) L: Exertion Length (mm)

开闭范围 (Stoke): 16mm

组合件产品重量 (Weight): 3.52kg

最大附件长度 (Max. length attach): 80mm

配管连接口 (Fitting size): M5-6H

理论夹持力-开 (Gripping force : Open): 1689N

理论夹持力-闭 (Gripping force : Close): 1634.4N

单循环空气消耗量 (Air consumption per cycle): 46cm³

开闭时间 (Closeing/Opening time): 0.05/0.05sec

重复精度 Repeat accuracy): 0.01mm

连续使用次数 (Continuation usage amount): 50

使用气压 (Operating pressure): 3-8bar

周围温度 (Ambient temperature): -5 to 60°C (-10 to 130°C)

润滑 (Lubrication): 不需要 (Needless)

根据 IEC60529 标准安全防护: IP64

Safety protection according to IEC60529 standard: IP64

所有数据在 7 Bar 时测量 (All data were measured at 7 Bar)

重复精度: 连续动作 100 次以后的检测值

After 100 consecutive strokes to end positions