





组合件型号: FY-CRJ-95-F&FY46ZM-D55
建议工件重量在5.4kg以下使用

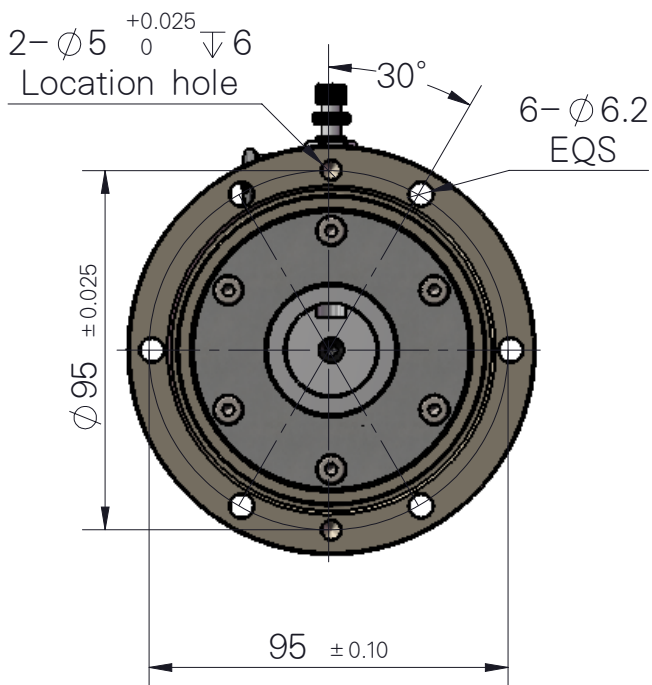

产品名称: 无限连续旋转接头-D95
型号: FY-CRJ-95-F

输入方式: 电动或气动
最高使用转速不大于: 130转/分钟
最高使用扭矩: 22N.m
使用气压范围: 0.2~1.5MPa
组合件整体重量: 2.8kg
所安装的夹爪建议使用: FOYOT品牌

警告:
1.当操作夹爪工作时, 请人员务必远离夹爪和机器人
人的活动部位, 否则将会造成人身伤害的险;
2.由于不同物件有其不同的摩擦系数, 当初次夹持
工件时, 请在空旷场地进行试夹, 确保夹稳固后
方可装机工作, 否则将会有跌落工件砸伤机器或
人员的风险
Warning:
1.When operating the gripper, please keep
away from it Gripper and robot's moving
parts, otherwise it will Risk of personal
injury;
2. Because different objects have different
friction coefficients, When clamping the
workpiece for the first time, please try
clamping in an open field. Ensure that the
clamping is firm before the machine can
work, otherwise it will There is a risk that
falling workpieces may damage machines or
personnel.

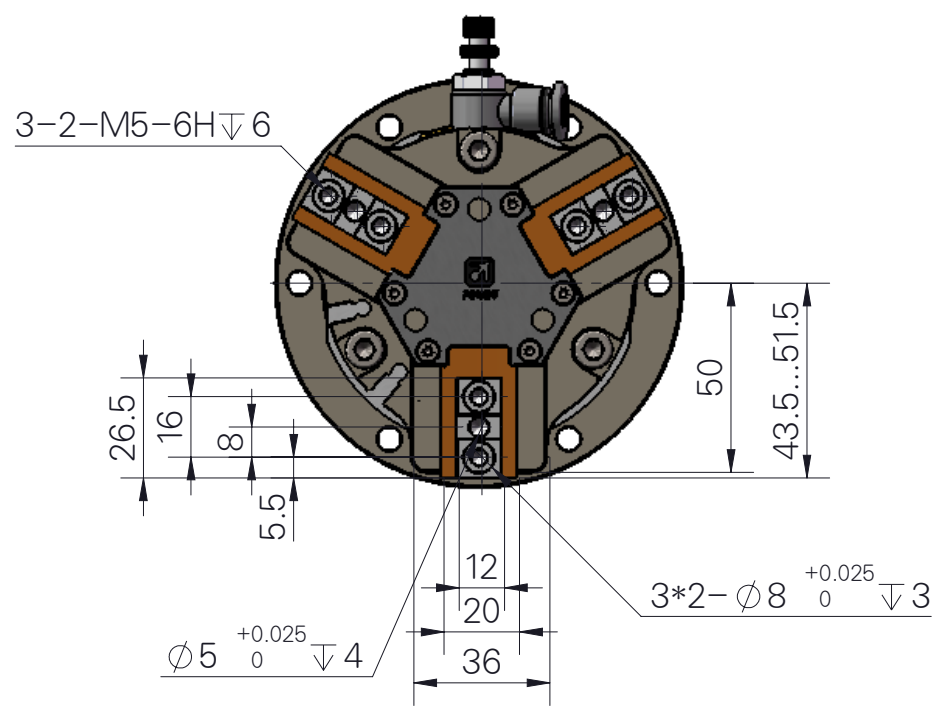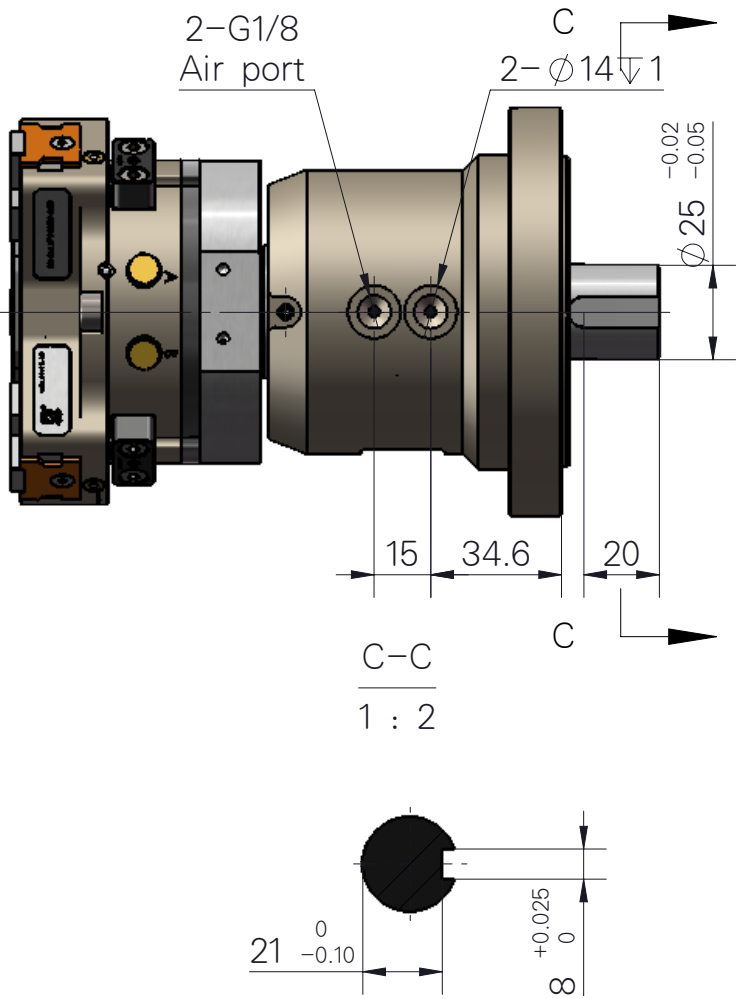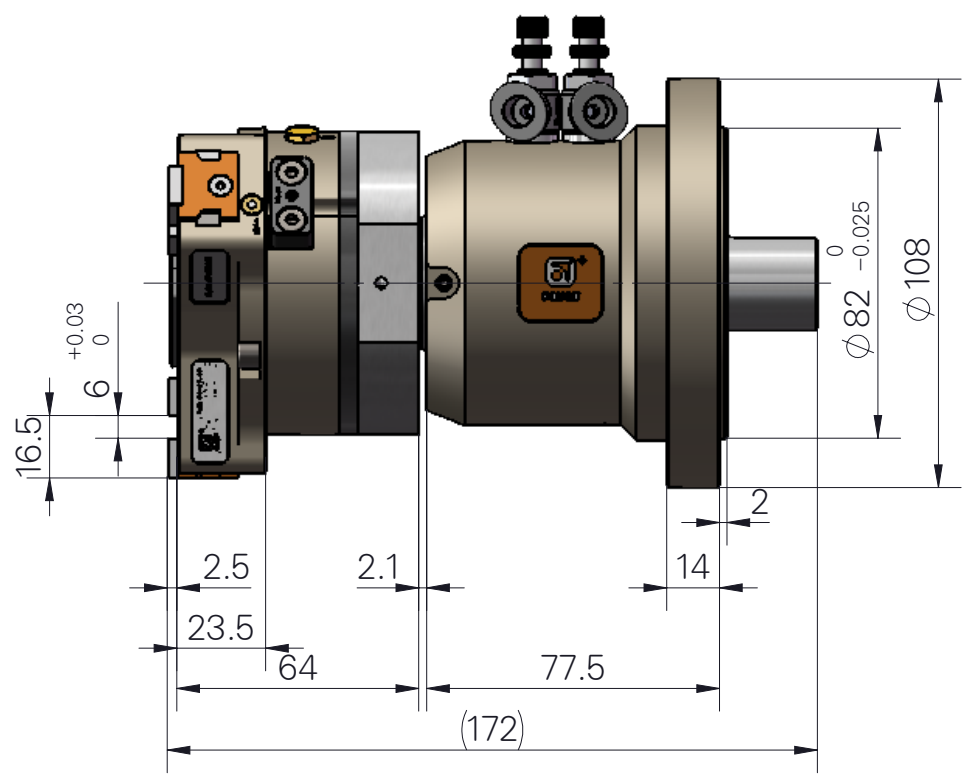

名称: 气动平行三爪
Name: Pneumatic parallel three claws
型号 (Model): FY46ZM-D55
P:空气压力 (bar) P:Air Pressure(bar)
L:到作用点距离 (mm) L:Exertion Length(mm)
开闭范围 (Stoke): 16mm
最大附件长度(Max. length attach):80mm
配管接口(Fitting size):M5-6H, 旋转头: G1/8"
理论夹持力-开(Gripping force :Open):1689N
理论夹持力-闭(Gripping force : Close):1634.4N
开闭时间(Closeing/Opening time):0.05/0.05sec
重复精度Repeat accuracy):0.01mm
连续使用次数(Continuation usage amount):50
使用气压(Operating pressure):3-8bar
周围温度(Ambient temperature): -5 to 60℃(-10 to 130℃)
润滑(Lubrication):不需要 (Needless)
根据IEC60529标准安全防护:IP64
Safety protection according to IEC60529 standard:IP64
所有数据在 7 Bar时测量(All data were measured at 7 Bar)
重复精度: 连续动作100次以后的检测值
After 100 consecutive strokes to end positions